


Uniclass	EPIC		
L432242:N544	D34/5:Y442		
CI/SfB	(44)	Hf9	(U47)



MAGMASTRIP & MAGMADISC™

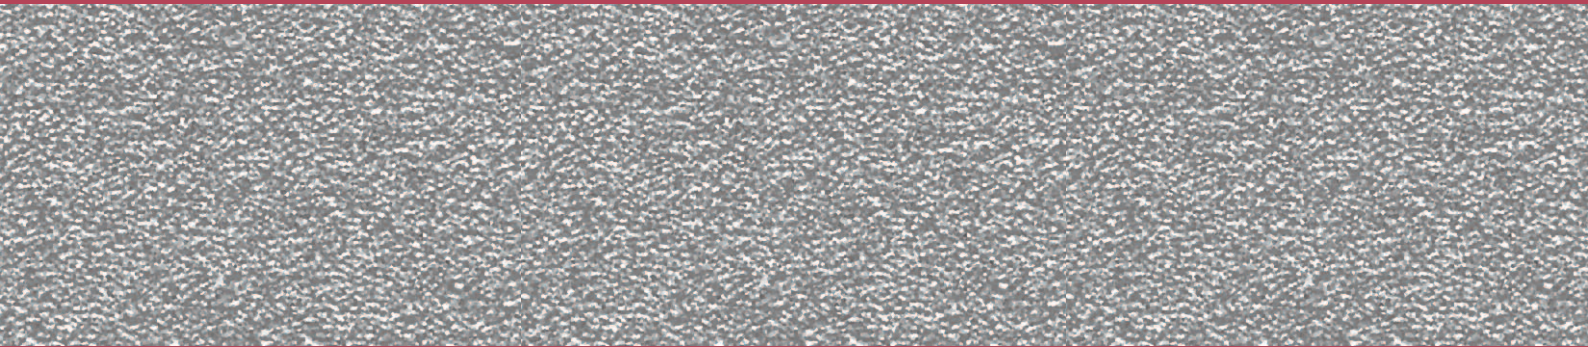

MAGMASTRIP™

MAGMASTRIP & MAGMADISC™ Carborundum inserts for pre-cast concrete and wooden stairs available in strips and discs of various sizes, and available in a range of colours. Suitable for bonding into in-situ units with gap filling or epoxy adhesive.

- Slip resistant inserts for stairs
- Now available in DDA compliant 55mm widths
- Manufactured in standard range of colours (charcoal, yellow & white). Bespoke colours available on request
- Suitable for use in concrete, terrazzo and timber steps
- Magma riser strips also available



MAGMASTRIP

MagmaStrip standard sizes:



15mm x 8mm



25mm x 8mm




35mm x 8mm



55mm x 9mm




75mm x 9mm

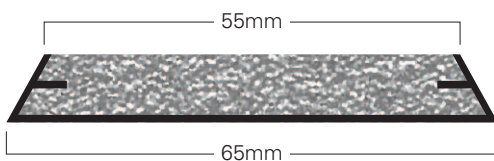

55mm x 9mm DT

TOLERANCES	
0 - 9	± 0.2
10 - 19	± 0.4
20 - 50	± 0.6
Over 50	± 1.0

All sizes nominal

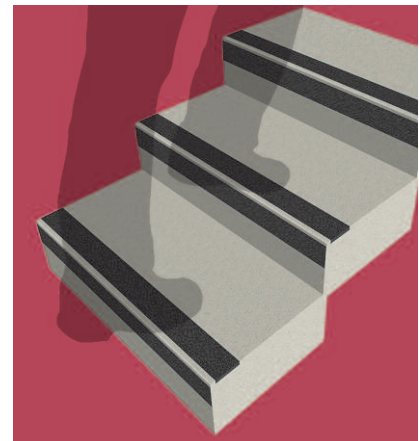





MAGMADISC

MagmaDisc standard sizes:

25mm



50mm

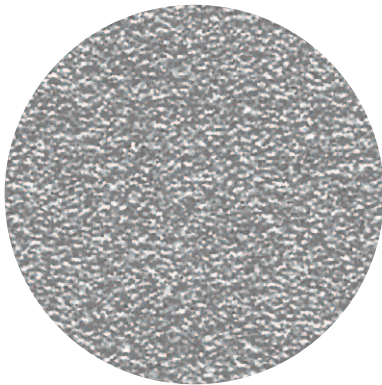

Test Results:

TRRL 'Pendulum' slip resistance measurements to a supplied section of MagmaStrip charcoal (75mm x 9mm) in accordance with BS EN 13036-4: 2003.

Sample ID	Dry/ Wet	Individual Measurements	PTV	Potential for Slipping
Magma Strip charcoal:	Dry	57, 56, 57, 56, 56	56.4	Low
Magma Strip charcoal, at 180° direction to first test:	Dry	55, 55, 55, 56, 55	55.2	Low
Magma Strip charcoal:	Wet	48, 48, 49, 49, 49	48.6	Low
Magma Strip charcoal, at 180° direction to first test:	Wet	51, 51, 51, 51, 51	51.0	Low



MAGMA Safety Products Ltd
Unit 1, Sawston Park,
London Road,
Pampisford,
Cambridge CB22 3EE

Tel: +44 (0)1223 836643
Fax: +44 (0)1223 834648
Email: info@magmasafety.co.uk

REV: 11.2011
MAGMASTRIP™ & MAGMADISC™ are trademarks of MAGMA Safety Products Ltd.
Due to our policy of continuous improvements to our products and service, we reserve the right to change designs or specifications without prior notice.